
GENERAL NOTES:

- 1. ALL WORK IN PUBLIC RIGHT-OF-WAY SHALL BE CONSTRUCTED BY A LICENSED CONTRACTOR AND REQUIRES A PERMIT AND APPROVAL BY THE DEPT. OF PUBLIC WORKS.
- 2. PAVEMENT SECTION IN ACCORDANCE WITH STANDARD DRAWING OR APPROVED PAVEMENT DESIGN PER PS-01.

KEYED NOTES:

1 8" CURB & GUTTER. SEE DWG. CG-01

- 4" THICK CONCRETE SIDEWALK. SEE DWG. DW-01. AN ASPHALT PATH MAY BE SUBSTITUTED FOR SIDEWALK ON ONE SIDE OF THE ROAD WITH CITY ENGINEER'S APPROVAL. THE PATH MUST BE A MINIMUM OF 8' WIDE.
- 3 MEDIAN CURB & GUTTER, SEE DWG CG-01
- WHERE ROW/PROP. WALL EXISTS OR IS PLANNED, SIDEWALK SHALL BE SETBACK A MINIMUM OF 1' FROM THE FACE OF WALL. AN APPROVED WEED FREE SURFACE SHALL BE PROVIDED WITHIN THE 1' SETBACK AREA. ACCEPTABLE WEED FREE SURFACES INCLUDE:
 - a. 4" THICK CONCRETE (WIDENED SIDEWALK)
 - b. GROUTED CONC., BRICK, OR STONE PAVERS (TYPE TO BE APPROVED BY THE DEPT. OF PUBLIC WORKS)
 - c. 4" THICK COMPACTED CRUSHER FINES WITH WEED BARRIER FABRIC. COMPACTED WITH HAND ROLLER.
- (5) BUFFER. SEE DWG. BF-01.
- CONTINUOUS TWO-WAY LEFT TURN LANE MAY BE SUBSTITUTED WITH APPROVAL BY THE CITY ENGINEER.




City of Rio Rancho Department of Public Works

TYPICAL STREET SECTION COLLECTOR STREET

DWG, NO, TS-02

SEPT 23, 2008

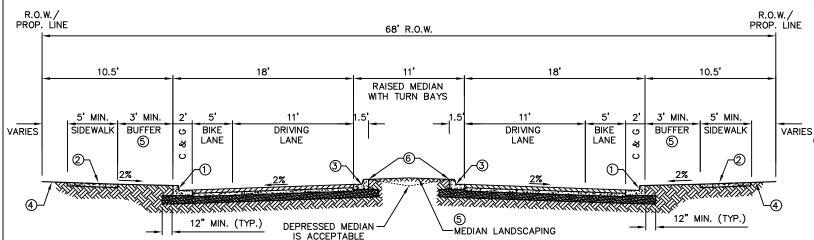

TYPICAL STREET SECTION - COLLECTOR STREET

DATE MODIFIED: JAN 21, 2010